

EMERALD M



Der Emerald Downlighter ist in 4 verschiedenen Wattagen, 5 verschiedenen Farbtemperaturen und mit verschiedenen CRI-Werten erhältlich, sodass Sie die perfekte Leuchte für Ihre Bedürfnisse finden können. Und da alle Dimmmethoden mit dem Emerald Downlight kompatibel sind, haben Sie jederzeit die vollständige Kontrolle über Ihre Beleuchtung.

Kategorien: [Emerald Series](#), [Innenraum](#), [Deckeneinbauleuchten](#), [Autohaus](#), [Buros](#), [Shops](#)

> Specifications


Type	Emerald M, Downlighter
Colour	White or Black
Material	Plastic PC_ABS V0, Anodized aluminium
Mounting hole	14 ~ 20 cm
Installation depth	71mm (4 serie), 106mm (5&6 serie) or 131mm (7 serie)
Optics	70° 83°
Light source	High Power LED
Light output	1600 - 4000 lumen
CRI	>90
LED colours	2500K 2700K 3000K 3500K 4000K D2W 1800K-3000K
Power consumption	Max. 15 - 41 Watt
Drive current	350mA-1000 mA
Driver	Driver included Driver external
Dimming	Mains dimmable DALI Casambi DMX512
Connection	CLS Smart Connect System
Cable length	150
IP rating	IP 40
Protection class	3
Certifications	CE

Lifetime
Warranty


50.000 hour
5 years

Remarks Innovative convex lens application that generates a unmatched light efficiency in combination with a very low glare

4 serie

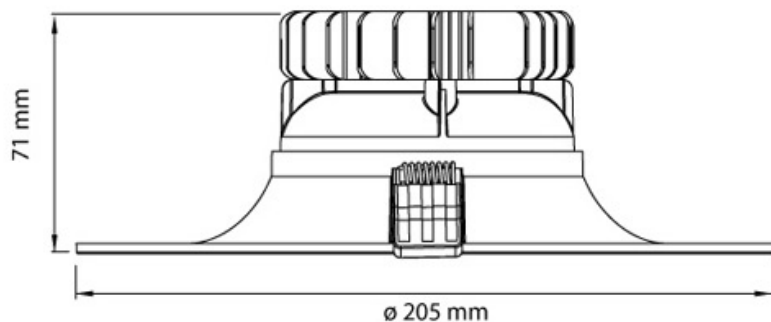

5 & 6 serie

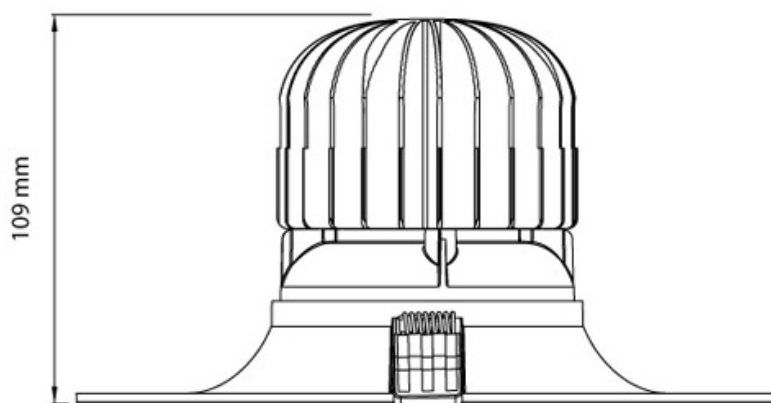

7 serie

