# EMERALD L

Le downlight Emerald L est un luminaire polyvalent et économe en énergie qui convient parfaitement à de nombreuses applications. Avec un grand angle de faisceau et un choix de différentes puissances, vous n'aurez aucune difficulté à trouver l'éclairage adapté à vos besoins. Les différentes températures de couleur et valeurs IRC vous permettent de configurer précisément l'éclairage de votre espace.

**Catégories :** Emerald Series, Intérieur, Appareils Encastrés, Hotels et Restaurants, Bureaux, Magasins

## > Specifications

| | |
|---|---|
| Type | Emerald L, Downlighter |
| Colour | Black or white |
| Material | Plastic (PC_ABS V0), anodized aluminium |
| Swivel | 360° horizontal |
| Mounting hole | 21-25 |
| Installation depth | 180mm (4~6 serie) or 205mm (7-serie) |

| | |
|---|---|
| Optics | 70° \| 83° |
| Light source | High Power LED |
| Light output | 1600 - 4000 lumen |
| CRI | ~90 |
| LED colours | 2500K \| 2700K \| 3000K \| 3500K \| 4000K<br>D2W 1800K-3000K |

| | |
|---|---|
| Power consumption | Max. 15 - 36 Watt |
| Drive current | 350mA~900 mA |
| Driver | Driver included \| Driver external |
| Dimming | Mains dimmable \| DALI \| Casambi \| DMX512 |
| Connection | Smart Connect system |
| Cable length | 150 cm |

| | |
|---|---|
| IP rating | IP 40 |
| Protection class | 3 |
| Certifications | CE |

| | |
|---|---|
| Lifetime | 50.000 hours |
| LB Value | L90B10 at 50.000h |
| Warranty | 5 years |

| | |
|---|---|
| Remarks | Highly efficient, very low glare convex lens |

4, 5 & 6 serie

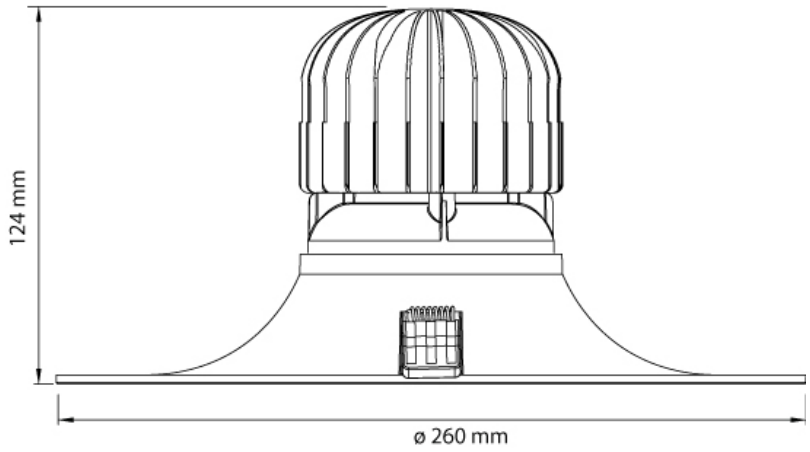

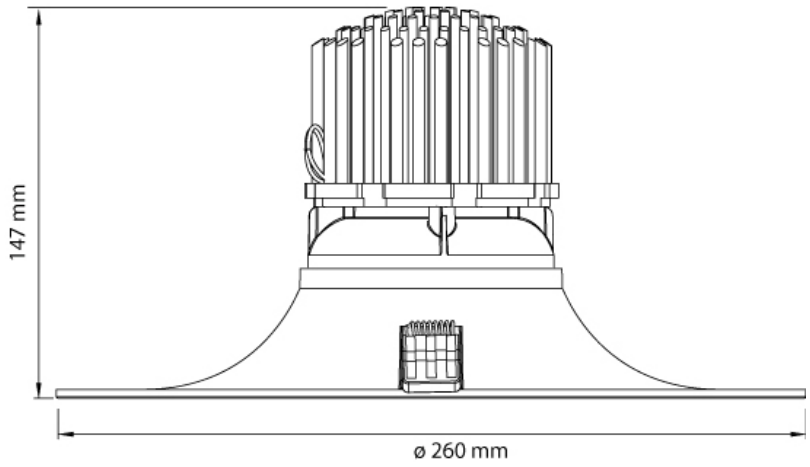
7 serie