

EMERALD M



De Emerald downlighter is verkrijgbaar in 4 verschillende wattages, 5 verschillende kleurtemperaturen en met verschillende CRI-waarden, zodat u de perfecte armatuur kunt vinden voor uw behoeften. En omdat alle dimmethodes compatibel zijn met de Emerald downlighter, heb je altijd volledige controle over je verlichting.

Categorieën: [Emerald Series](#), [Interieur](#), [Downlighter](#), [Autoshowrooms](#), [Kantoren](#), [Retailverlichting](#)

> Specifications

Type	Emerald M, Downlighter
Colour	White or Black
Material	Plastic PC_ABS V0, Anodized aluminium
Mounting hole	15 ~ 20 cm
Installation depth	165mm (4~6 serie) or 190mm (7 serie)

Optics	70° 83°
Light source	High Power LED
Light output	1600 - 4000 lumen
CRI	~90
LED colours	2500K 2700K 3000K 3500K 4000K D2W 1800K-3000K


Power consumption	Max. 15 - 36 Watt
Drive current	350mA ~ 900mA
Driver	Driver included Driver external
Dimming	Mains dimmable DALI Casambi DMX512
Connection	CLS Smart Connect System
Cable length	150

IP rating	IP 40
Protection class	3
Certifications	CE

Lifetime	50.000 hour
LB Value	L90B10 at 50.000h
Warranty	5 years

Remarks Innovative convex lens application that generates a unmatched light efficiency in combination with a very low glare

4, 5 & 6 serie

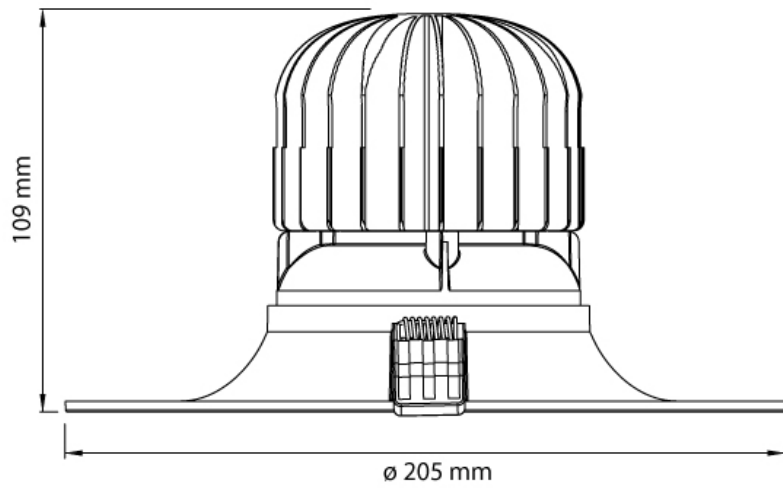

7 serie

