

## JADE ZOOM



De Jade Zoom is een veelzijdig en krachtig LED armatuur. Met een zoombereik van 9° tot 58° (Bridgelux) of 11° tot 67° (Xicato) is hij ideaal voor museum-, galerie-, of high-end retailverlichting. Het geavanceerde optische systeem zorgt voor een gelijkmatige lichtkwaliteit, terwijl de keuze aan LED-lichtbronnen een perfecte afstemming op het verlichtingsplan mogelijk maakt.

**Categorieën:** [Jade Series](#), [Interieur](#), [Rail-armaturen](#), [Musea en Galerijen](#)

### > Specifications

Type	Jade Zoom, 25 or 35 Watt track or surface mounted spot
Colour	Black, white or grey
Material	Anodized or coated aluminium & PC/ABS V0
Weight	955 gram
Swivel	340° horizontal   350° vertical

Optics	9°- 58°   11°- 67°
Light source	Bridgelux or Xicato
Light output	1500 - 2000 lumen
CRI	~90 or ~98
LED colours	2700K   3000K   3500K   4000K


Power consumption	Max. 25 - 35 Watt
Power supply	180~264 VAC
Driver	Driver included   Driver internal
Dimming	mains   local   dali   casambi   dmx   wireless   localcasambi   nfc
Connection	Track adapter, Global or Eutrac

IP rating	IP 20
Protection class	1
Certifications	CE

Lifetime	50.000h
LB Value	L90B10 at 50.000h

Warranty 5 years

Accessories A customizable snoot that can be build up in segments of 2 cm. Rotatable barndoor, Beam shapers and Honeycomb louvre.  
Remarks The beam angle can be adjusted from the backside of the fixture.

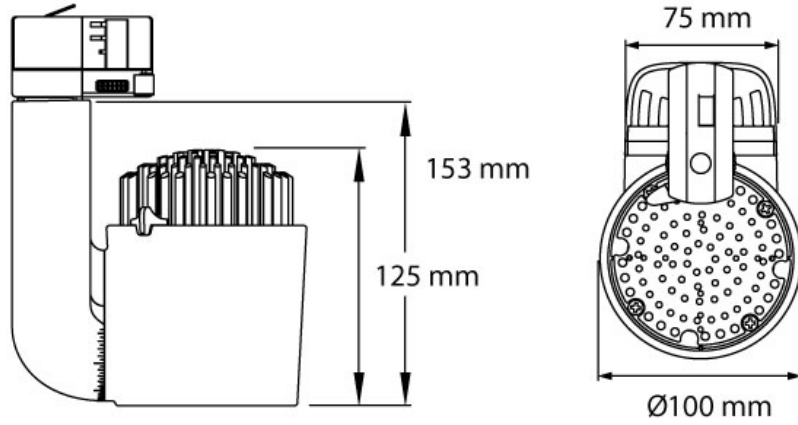

Jade B Zoom

