

## RUBY BRACKET MODULAR COLOURFLOW



De Ruby Bracket ColourFlow is een uniek verlichtingsarmatuur die veelzijdige mogelijkheden biedt voor lichtontwerpen. Met hoogwaardig wit licht en schaduwvrije kleurmenging is de Ruby perfect voor algemene verlichting in uiteenlopende ruimten. Bovendien kunt u dankzij de Tunable White LED-modules standaard kiezen tussen 1800-4000K en 2700-6500K. Deze armaturen zijn eenvoudig op te stellen en te gebruiken dankzij de Powercon TRUE in/out aansluitingen die het mogelijk maken om tot 6 units door te lussen op één stroompunt.



**Categorieën:** [Productseries](#), [Ruby Series](#), [Interieur](#), [Opbouwverlichting](#), [ColourFlow](#), [Architainment](#), [Theaters en concertzalen](#)

### > Specifications

Type	Ruby Bracket Modular ColourFlow, Indoor surface mounted
Colour	White or black
Material	Coated aluminium
Weight	3600 gram
Optics	16°   49°   63°
Light source	CLS DCC
LED colours	RGB-W 3000K   RGB-W 4000K   RGB-A 1800K-4000K   2700K-6500K
Power consumption	Max. 45 - 90 Watt
Power supply	80 ~ 264
Driver	Driver included   Driver internal
Dimming	dmx   analog   hybrid   pwm   nfc
Connection	Power: Neutrik Powercon TRUE DMX: XLR3
IP rating	IP 20
Protection class	1
Certifications	CE
Energy label	A
Lifetime	50000 hours

LB Value L90B10 at 50.000h  
Warranty 5 years

Accessories Reflectors in several different beam angles and a honeycomb louvre  
Remarks Neutrik Powercon TRUE chassis / DMX XLR3 chassis

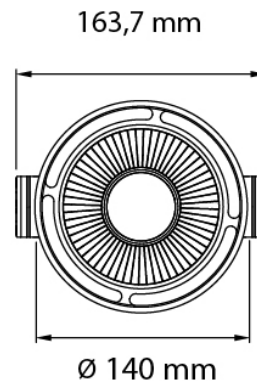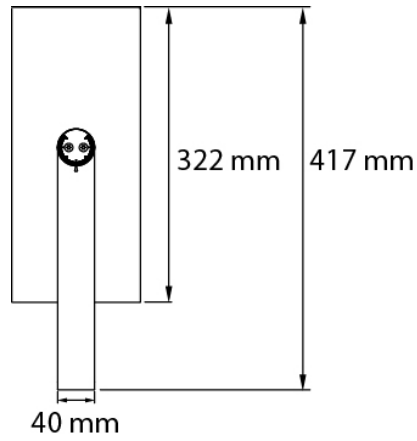

Backplate

