

EMERALD L



The Emerald L downlighter is a versatile and energy-efficient lighting fixture that is perfect for a variety of applications. With a large beam angle and a choice of different wattages, it is easy to find the right lighting for your needs. The different colour temperatures and CRI values mean that you can perfectly configure the lighting for your space.

Categories: [Emerald Series](#), [Indoor](#), [Downlighter](#), [Hotels and Restaurants](#), [Offices](#), [Retail](#)

> Specifications

| | |
|--------------------|---|
| Type | Emerald L, Downlighter |
| Colour | Black or white |
| Material | Plastic (PC_ABS V0), anodized aluminium |
| Swivel | 360° horizontal |
| Mounting hole | 21-25 |
| Installation depth | 180mm (4~6 serie) or 205mm (7-serie) |

| | |
|--------------|--|
| Optics | 70° 83° |
| Light source | High Power LED |
| Light output | 1600 - 4000 lumen |
| CRI | ~90 |
| LED colours | 2500K 2700K 3000K 3500K 4000K D2W 1800K-3000K |


| | |
|-------------------|-------------------------------------|
| Power consumption | Max. 15 - 36 Watt |
| Drive current | 350mA~900 mA |
| Driver | Driver included Driver external |
| Dimming | Mains dim DALI Casambi DMX512 |
| Connection | Smart Connect system |
| Cable length | 150 cm |

| | |
|------------------|-------|
| IP rating | IP 40 |
| Protection class | 3 |
| Certifications | CE |

| | |
|----------|-------------------|
| Lifetime | 50.000 hours |
| LB Value | L90B10 at 50.000h |
| Warranty | 5 years |

Remarks Highly efficient, very low glare convex lens

4, 5 & 6 serie

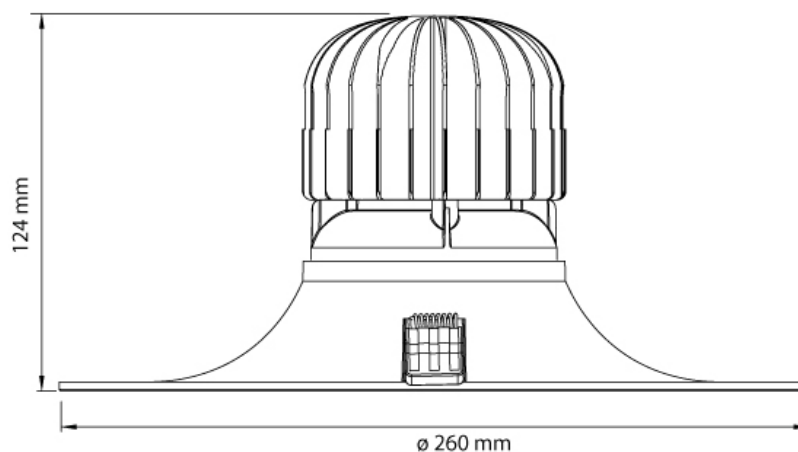

7 serie

