

EMERALD L



The Emerald L downlighter is a versatile and energy-efficient lighting fixture that is perfect for a variety of applications. With a large beam angle and a choice of different wattages, it is easy to find the right lighting for your needs. The different colour temperatures and CRI values mean that you can perfectly configure the lighting for your space.

Categories: [Emerald Series](#), [Indoor](#), [Downlighter](#), [Hotels and Restaurants](#), [Offices](#), [Retail](#)

> Specifications

Type	Emerald L, Downlighter
Colour	Black or white
Material	Plastic (PC_ABS V0), anodized aluminium
Swivel	360° horizontal
Mounting hole	21-25
Installation depth	86mm (4-series), 121mm (5&6 serie) or 146mm (7-serie)

Optics	70° 83°
Light source	High Power LED
Light output	1600 - 4000 lumen
CRI	>90
LED colours	2200K 2400K 2700K 3000K 3500K 4000K D2W 1800K-3000K


Power consumption	Max. 15 - 41 Watt
Drive current	350mA-1000 mA
Driver	Driver included Driver external
Dimming	Mains dimmable DALI Casambi DMX512
Connection	Smart Connect system
Cable length	150 cm

IP rating	IP 40
Protection class	3
Certifications	CE


Lifetime	50.000 hours
Warranty	5 years

Remarks	Highly efficient, very low glare convex lens
---------	--

4 serie

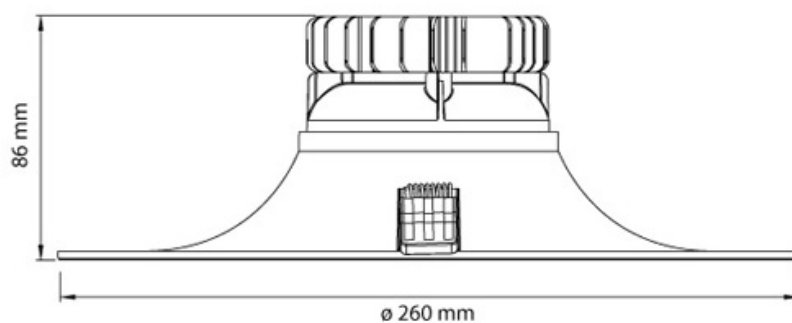

5 & 6 serie

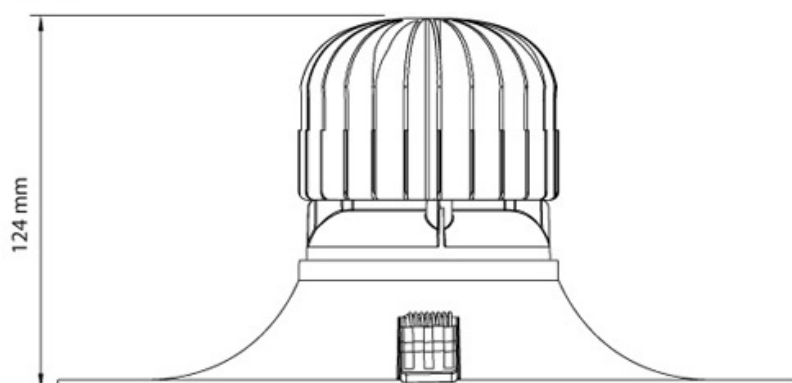

7 serie

