


LINA SUSPENDED HP

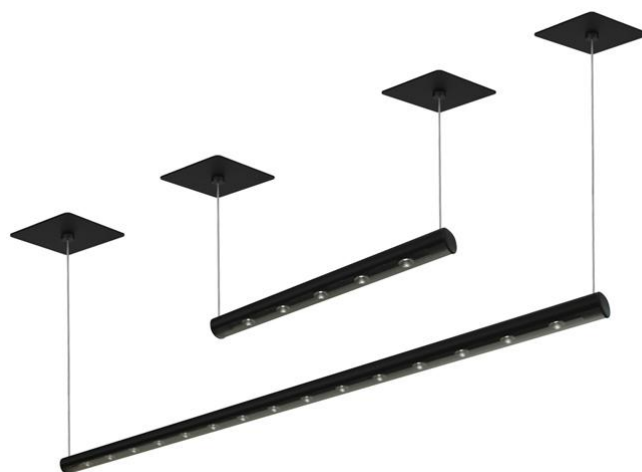


An extremely compact, modular linear lighting solution that is perfect for a wide range of applications. With its barely noticeable suspension and power cable and timeless design, the Lina HP is a versatile fixture that can be used in any environment. The Lina HP is available in 5 different beam angles, including an elliptical beam angle.

Categories: [Lina Series](#), [Indoor](#), [Linear](#), [Retail](#)

> Specifications

| | |
|-------------------|---|
| Type | Lina Suspended HP, Suspended Linear Track Fixture |
| Colour | Black or white |
| Material | Anodized or coated aluminium |
| Optics | 14° 16° 30° 42° 120° 36° x 14° |
| Light source | High Power LED |
| CRI | ~92 |
| LED colours | 2200K 2700K 3000K 4000K |
| Power consumption | Max. 8 - 24 Watt |
| Power supply | 100~240 VAC |
| Driver | Driver excluded Driver external |
| Dimming | Mains dimmable 1-10V dimmable DALI Casambi DMX512 |
| Connection | Wire |
| Cable length | 180 cm max. |
| IP rating | IP 20 |
| Protection class | 1 |
| Certifications | CE |
| Lifetime | 50.000 hours |
| LB Value | L90B10 at 50.000h |
| Warranty | 5 years |

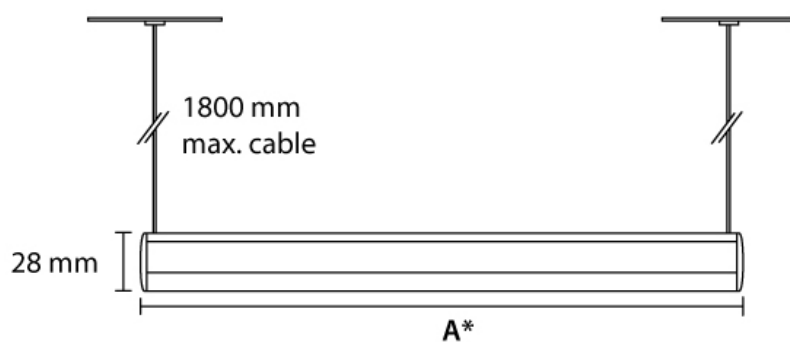

| A | Model |
|--------|--------------------|
| 296 mm | Lina Clip RP 30 cm |
| 546 mm | Lina Clip RP 55 cm |
| 796 mm | Lina Clip RP 80 cm |