

RUBY BRACKET MODULAR COLOURFLOW



The Ruby Bracket ColourFlow is a unique lighting fixture that offers versatile possibilities for lighting design. With its high-quality white light and shadow-free colour mixing, it is perfect for general illumination in a variety of spaces. Additionally, its Tunable White LED modules allows you to choose between 1800-4000K and 2700-6500K as standard. These fixtures are easy to set up and use, thanks to the Powercon TRUE in/out power connectors that allow daisy-chaining up to 6 units on a single power outlet.

Categories: [Product Series](#), [Ruby Series](#), [Indoor](#), [Surface mounted](#), [ColourFlow](#), [Architainment](#), [Theatres & Concert halls](#)

> Specifications

Type	Ruby Bracket Modular ColourFlow, Indoor surface mounted
Colour	White or black
Material	Coated aluminium
Weight	3600 gram

Optics	16° 49° 63°
Light source	CLS DCC
LED colours	RGB-W 3000K RGB-W 4000K RGB-A 1800K-4000K 2700K-6500K



Power consumption	Max. 45 - 90 Watt
Power supply	80 ~ 264
Driver	Driver included Driver internal
Dimming	dmx analog hybrid pwm nfc
Connection	Power: Neutrik Powercon TRUE DMX: XLR3

IP rating	IP 20
Protection class	1
Certifications	CE
Energy label	A

Lifetime	50000 hours
LB Value	L90B10 at 50.000h

Warranty 5 years

Accessories Reflectors in several different beam angles and a honeycomb louvre
Remarks Neutrik Powercon TRUE chassis / DMX XLR3 chassis

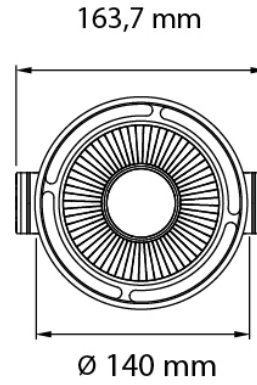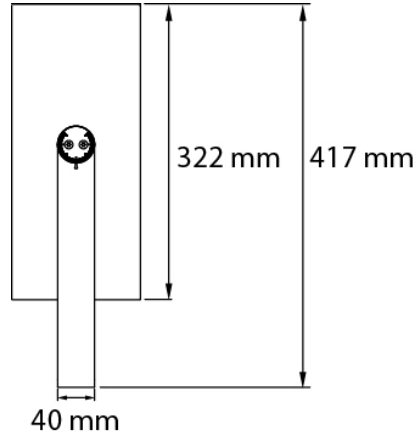

Backplate

